#### SECTION 1 – IDENTIFICATION

Distributed by:

Company: TOTALBOAT LLC
Street Address: 17 Peckham Drive
City / State / Zip: Bristol, RI 02809

**Phone:** (800) 497-0010

Product Name: TotalBoat Seal Marine Sealant

Synonyms:

Part Number(s): TB-SEALWHT

**Recommended use:** Adhesive for marine applications **Restrictions on use:** Use only as recommended

#### SECTION 2 – HAZARD(S) IDENTIFICATION

This material is considered hazardous per the US OSHA Hazard Communication Standard (29CFR1910.1200).

Skin corrosion/irritation, Category 2

Serious eye damage/eye irritation, Category 2A

Reproductive Toxicity, Category 2

**Hazard Classification:** Specific Target Organ Toxicity – Single Exposure, Category 3 (narcotic effects)

Specific Target Organ Toxicity – Repeated/Prolonged Exposure, Category 2

(auditory system, eyes; inhalation)

Flammable Liquids, Category 2

Signal Word: Danger

Causes skin irritation. Causes serious eye irritation. Suspected of damaging fertility or the unborn child. May cause drowsiness or dizziness. May cause damage to

Emergency Contact Information
Call INFOTRAC 800-535-5053

organs (auditory system, eyes) through prolonged or repeated exposure

(inhalation). Highly flammable liquid and vapor.

**Hazard Symbols:** 

**Hazard Statements:** 







#### PREVENTION

Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Wear eye and face protection, protective gloves and clothing. Do not breathe fumes or vapors. Use only outdoors or in a well-ventilated area. Wash hands and exposed skin thoroughly after handling. Keep away from heat, hot surfaces, sparks and open flames. - No smoking. Keep container tightly closed. Ground and bond container and receiving equipment. Use explosion-proof electrical equipment. Use only non-sparking tools. Take precautionary measures against static discharge.

#### **Precautionary Statements:**

#### **RESPONSE**

If on skin (or hair): Take off immediately all contaminated clothing. Wash with

soap and plenty of water.

If skin irritation occurs: Get medical attention.

If inhaled: Remove person to fresh air and keep comfortable for breathing. Call an

ambulance or poison center if you feel unwell.

If in eyes: Rinse cautiously with water for several minutes. Remove contact

lenses, if present and easy to do. Continue rinsing. If eye irritation persists: Get medical attention. If exposed or concerned: Get medical advice.

Get medical advice if you feel unwell. Take off contaminated clothing and wash it

before reuse.

SDS: TotalBoat Seal Marine Sealant Revision Date: 14 December 2021 Page 1 of 7

**In case of fire:** Use alcohol-resistant foam, carbon dioxide, dry chemical powder, or sand to extinguish.

**STORAGE** 

Store locked up. Store in a well-ventilated place. Keep container tightly closed. Keep cool.

**DISPOSAL** 

Contact local municipal, state and/or federal agencies to determine appropriate disposal options for the product. Dispose of this container with a registered reconditioner or as otherwise appropriate.

**Hazards Not Otherwise** 

Classified: None.

**General Advice:** Practice good general industrial hygiene.

#### **SECTION 3 – COMPOSITION / INFORMATION ON INGREDIENTS**

Nature of product: Mixture

Ingredient Name	CAS Number	%	GHS Classification	
		`	Skin corrosion/irritation, Category 2	
			Serious eye damage/eye irritation, Category 2A	
			Reproductive toxicity, Category 2	
			Specific target organ toxicity - single exposure,	
Toluene	108-88-3	30-60	Category 3 (narcotic effects)	
			Specific target organ toxicity - repeated exposure	
3			(Inhalation), Category 2 (Auditory system, Eyes)	
			Aspiration hazard, Category 1	
			Flammable liquids, Category 2	

If Chemical Name & CAS # is "proprietary" &/ Weight-% is listed as a range: the specific chemical identity and/or percentage of composition has been withheld as a trade secret or percentage of composition is due to batch variation. There are no additional ingredients present which, to the best knowledge of the manufacturer, are classified and contribute to the classification of the substance and therefore require reporting.

#### **SECTION 4 – FIRST-AID MEASURES**

General Advice:	Provide this SDS to any medical personnel responding to a call for help.  The product exhibits adhesive properties.				
Eye contact:	Rinse immediately with plenty of water, including under the eyelids, for at least 15 minutes. Get medical attention.				
Skin contact:	Wash off immediately with plenty of soap and water for at least 15 minutes. Remove contaminated clothing.				
Inhalation:	Remove patient to fresh air. If breathing is difficult, keep patient at rest, in a position comfortable for breathing. When administering rescue breathing, rescuer must take precautions against exposure.				
Ingestion:	Do NOT induce vomiting. Rinse mouth. Give a conscious patient water to drink. Never give anything by mouth to an unconscious patient. If the patient continues to feel unwell, get medical attention.				
Most Important Symptoms, Acute & Delayed:	Irritation of the affected area.				
Indication of immediate medical attention or special treatment:	No data available				

SDS: TotalBoat Seal Marine Sealant Revision Date: 14 December 2021 Page 2 of 7

Note to Physician: Treat symptomatically. The adhesive properties of the product may

necessitate mechanical removal from the eye.

SECTION 5 - FIRE-FIGHTING MEASURES

Suitable Extinguishing Media: Foam, carbon dioxide, dry chemical powder, sand.

Unsuitable Extinguishing Media: Water may spread burning material.

Heating may generate explosive vapor/air mixtures. Combustion may

**Specific hazards:** result in hazardous combustion products including Carbon monoxide, and Carbon dioxide. Do not allow run-off from firefighting to enter drains or

water courses.

Special precautions for fire- Do not breathe fumes. Use water to cool surrounding containers. Treat

fighters: as an oil fire. Wear SCBA if fighting fire close-in.

SECTION 6 - ACCIDENTAL RELEASE MEASURES

Personal precautions, protective equipment, & emergency procedures:

Ensure adequate ventilation. Exclude unnecessary personnel. Eliminate all ignition sources. Use non-sparking tools. Prevent discharge to the ground, sewers, drains, or waterways. Wear Personal

Protective Equipment (PPE) appropriate to clean-up.

Methods and materials for containment and clean-up:

Prevent entry into waterways, sewer, basements, or confined areas. Dike material to prevent spreading. Use non-sparking tools. Prevent further leakage / spillage if safe to do so. Absorb with inert material and transfer to a waste container. Clean small spills with absorbent cloth,

and wash surface to remove residual contamination.

General advice:

Spilled material may cause slippery conditions. Prevent further leakage or spillage if safe to do so. Discharge into the environment should be avoided. Inform authorities of all environmental releases as appropriate.

SECTION 7 - HANDLING AND STORAGE

Precautions for safe handling:

Observe good general industrial hygiene. Avoid contact with skin and eyes. Avoid prolonged exposure. Do not breathe mist or vapor. Keep container closed when not in use. Do not eat, drink, or use tobacco products when using this product. Ensure adequate ventilation. Wear appropriate personal protective equipment. Do not use pressure to empty

drums. Keep away from open flames, hot surfaces, and sources of ignition. Wash thoroughly after handling. Avoid release to the

environment.

Conditions for safe storage:

Store locked up. Keep containers tightly closed, out of direct sunlight, at

ambient temperatures in a dry and well-ventilated place.

Materials incompatible with product:

Strong oxidizing agents.

#### SECTION 8 – EXPOSURE CONTROLS / PERSONAL PROTECTION

Substance Identity	CAS#	Regulating Body	Value Type	Value
Toluene	108-88-3	OSHA Z-2	PEL as TWA	200 ppm

Maintain adequate ventilation (10 air changes / hour minimum). Use general Engineering Controls: ventilation, local exhaust, and other necessary engineering controls to control

airborne levels below exposure limit. Avoid heat and sparks (from grinding or

SDS: TotalBoat Seal Marine Sealant Revision Date: 14 December 2021 Page 3 of 7

static discharge). Ensure eyewash stations and showers are available and in good working order.

Individual protection measures:

Use good general industrial hygiene. Use personal protective equipment. If local exhaust is inadequate, use an appropriate respirator. Do not eat, drink, or use tobacco products when working with this product.

#### SECTION 9 - PHYSICAL & CHEMICAL PROPERTIES

Appearance:	A thick, white, extrudable semi-solid.	Lower flammability (or explosive) limits:	No data available
Odor:	Toluene	Upper flammability (or explosive) limits:	No data available
Odor threshold:	No data available	Vapor Pressure:	No data available
pH:	Not applicable	Vapor Density:	No data available
Melting / Freezing Point:	No data available	Relative Density:	0.8
Initial Boiling Point:	No data available	Solubility:	Insoluble in water
Boiling Range:	No data available	Partition Coefficient: n-Octane / Water	No data available
Flash Point:	50 °F (10 °C)	Auto-ignition Temperature:	No data available
Evaporation Rate:	No data available	Decomposition Temperature:	No data available
Flammability (solid, gas):	Not applicable	Viscosity:	No data available

**NOTE:** the physical data presented above are typical values and should not be construed as a specification.

#### SECTION 10 - STABILITY & REACTIVITY

**Reactivity:** Not reactive under typical conditions.

Chemical stability: Stable under typical storage conditions.

Possibility of hazardous reactions: Will not polymerize.

> Exceptionally high temperatures, ignition sources, poorly ventilated Conditions to avoid:

working or storage areas.

Incompatible materials: Strong oxidizing agents.

**Hazardous decomposition** Will not decompose under typical conditions.

products:

## SECTION 11 – TOXICOLOGICAL INFORMATION

Skin contact and eye contact are the most likely routes of exposure.

Likely routes of exposure: Exposure by ingestion is possible but unlikely.

Given the nature of the product, exposure by inhalation or injection is unlikely.

Will adhere to the skin. May cause skin irritation. Causes serious eye irritation.

Suspected of damaging fertility or the unborn child. May cause damage to

Symptoms and effects: Inhalation of vapors may cause narcotic effects. Symptoms of overexposure

include headache, dizziness, tiredness, nausea and vomiting.

**Chronic effects:** organs through prolonged or repeated exposure.

Numerical measure of This product is not classified as Acutely toxic.

toxicity:

Neither this product, nor those components with applicable routes of exposure Carcinogenicity: present in concentrations of ≥ 0.1%, appear on the NTP list, the IARC list, or the

OSHA list of known or potential carcinogens.

#### SECTION 12 - ECOLOGICAL INFORMATION

SDS: TotalBoat Seal Marine Sealant Revision Date: 14 December 2021 Page 4 of 7

Aquatic toxicity: No data available

Terrestrial toxicity: No data available

Persistence and degradability: No data available
Bioaccumulative potential: No data available

Mobility in soil: No data available
Other adverse effects: No data available

#### SECTION 13 – DISPOSAL CONSIDERATIONS

Disposal method:

Dispose of unused and/or contaminated material in accordance with local, state,

and federal regulations.

Container disposal method:

Send durable containers to a reconditioner for refurbishment. Dispose of other

containers in accordance with local, state, and federal regulations.

#### **SECTION 14 – TRANSPORTATION INFORMATION**

UN1133, Adhesives, 3, II

**US DOT Highway & Rail:** This product qualifies for the exceptions given at 49CFR173.150.

This product is NOT REGULATED in Limited Quantities.

Marine Pollutant: No data available

IMO / IMDG Water Transport: No data available

Transport in bulk according to Annex I or II of MARPOL 73/78 and the IBC / IGC

Code: transport.

ICAO / IATA Air Transport: No data available

#### SECTION 15 – REGULATORY INFORMATION

#### **Chemical Inventory Compliance**

This product complies with the national inventories of the following countries:

OSHA Hazard Communication Standard (as regulated by US 29CFR1910.1200):

CERCLA This product, as supplied, contains the following hazardous substances with a Comprehensive Environmental Response Compensation and Liability Act Reportable Quantity (CERCLA RQ) as regulated by US 40CFR302 (a release equal to or greater than the RQ requires reporting to the National Response Center (800-424-8802), the SERC, and the LEPC):

**EPCRA Sections 301-303 & 304** This product, as supplied, contains the following Extremely Hazardous Substances (EHS) subject to a Threshold Planning Quantity (TPQ) and Reportable Quantity (RQ) as regulated by US 40CFR355 (a release equal to or greater than the RQ requires reporting to the SERC and LEPC):

EPCRA Section 311 & 312

(as regulated by US 40CFR370 for Tier II Reporting):

**EPCRA Section 313** 

(as regulated by US 40CFR372 for TRI Reporting):

US TSCA

This material is considered hazardous by the OSHA HazCom 2012 Standard (29CFR1910.1200).

Calculated RQ exceeds reasonably attainable upper limit.

None.

Refer to Sections 2 and 3 of this SDS for information.

No components listed above de minimus threshold concentrations.


SDS: TotalBoat Seal Marine Sealant Revision Date: 14 December 2021 Page 5 of 7

**US CWA** This product, as supplied, contains the following substances regulated as pollutants pursuant to the Clean Water Act (40CFR122.21 & 40CFR122.22): **US CAA HAPs** This product, as supplied, contains the following substances regulated as Hazardous Air

Pollutants under the Clean Air Act Section 112:

No Data Available.

No Data Available.

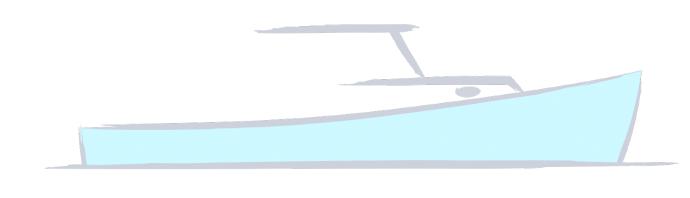

# TOTALBOAT

SDS: TotalBoat Seal Marine Sealant Revision Date: 14 December 2021 Page 6 of 7

#### **SECTION 16 – OTHER INFORMATION**

Revision Date: 14 December 2021

NFPA Rating: Health / Blue: Flammability / 3 Instability / Yellow: Specific Hazard / Specific Hazard /

This material is usually prepared and distributed as a consumer product. Consumer use should follow precautions and instructions found on the consumer package. This SDS is intended for communicating hazards in the workplace.

**Disclaimer:** This Safety Data Sheet (SDS) was prepared to comply with the US OHSA Hazard Communication Standard (29 CFR 1910.1200; aka HazCom 2012). This SDS supersedes any previous SDS. The information and recommendations described in this SDS are provided in good faith and based upon data believed to be correct. However, the information provided in this SDS is provided without any warranty, express or implied, regarding its correctness or accuracy. The information provided applies only to the product as shipped. The information is offered for the end user's information, consideration, and further investigation. The information contained in this document is not to be construed as absolute or complete since additional information may be necessary or desirable when particular / exceptional conditions / circumstances exist; or, because of applicable laws or government regulations. Since the actual conditions for the use of the product are beyond the manufacturer's control, no guarantee (express or implied) is made as to the effects of such use or the results to be obtained. The sole responsibility to determine appropriate conditions for the use of this product and the assumption of liability for any loss, damage, or expense arising from the product's use rests with the end user. The end user is encouraged to read the SDS and understand any associated hazards associated with the product thoroughly before using. It is the end user's responsibility to ensure that use, handling, storage, and disposal of the product complies with all federal, state, provincial, and local laws.



SDS: TotalBoat Seal Marine Sealant Revision Date: 14 December 2021 Page 7 of 7